



Compatible with Direct Thermal/Thermal Transfer



Supports all types of weighing devices

BP-1100 PLUS

Barcode Printer

BP-1100PLUS is a barcode printer for the industrial label printing work such as logistics/distribution/production. Users can print either Direct Thermal or Thermal Transfer methods, also it is easy to use and has a high durability.


The printer is highly compatible with PC and other weighing devices, providing various interfaces; USB, RS-232 and Parallel port.



BP-1100PLUS | Barcode Printer


Provides both Direct Thermal & Thermal Transfer

When printing labels, BP-1100PLUS provides both Direct Thermal and Thermal Transfer methods.



Various interfaces

BP-1100PLUS basically offers following interfaces; USB, RS-232 and Parallel port.

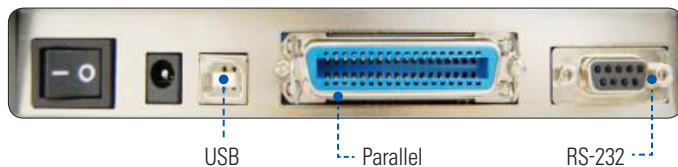

Cooperate with weighing devices

Using a communication protocol, the printer is compatible with PC and various weighing devices for printing



OPTION

- External Label Holder
- CF card adapter (Include RTC)
- Stripper Module
- Cutter Module

SPECIFICATIONS

Model	BP-1100PLUS
Print Method	Thermal Transfer/Direct Thermal
Resolution	203 dpi (8 dot/mm)
Print Speed	Max. 4IPS (100 mm/s)
Print Width	Max. 108 mm (4.25 Inch)
Print Length	Min. 10 mm ~ Max. 1727 mm
Memory	4MB Flash (User Memory 2MB), 8MB SDRAM
Sensor Type	Adjustable reflective sensor. Fixed transmissive sensor, central aligned
Media	Types: Continuous form, gap labels, black mark sensing, and punched hole; label length set by auto sensing or programming
	Width: 25.4 mm ~ 118 mm
	Label roll diameter: Max. 5" (127 mm) Core diameter: 25.4 mm/38.1 mm
Ribbon	Length: 300 m / Ribbon roll diameter: 68 mm
	Width: 30 mm ~ 110 mm / Types: Wax, wax/resin, resin
Software	Label design software: QLabel-IV (for EZPL only) Driver & DLL: Windows 2000, XP, Vista
Resident Fonts	Bitmap Font: 6, 8, 10, 12, 14, 18, 24, 30, 16 x 26 and OCR A & B
	Bitmap fonts 8 times expandable in horizontal and vertical directions
Download Fonts	Bitmap fonts 90°, 180°, 270° rotatable, single characters 90°, 180°, 270° rotatable
	Asian fonts 90°, 180°, 270° rotatable and 8 times expandable in horizontal and vertical directions
	Scalable fonts 90°, 180°, 270° rotatable
Barcodes	1D Barcode: Code 39, Code 93, Code 128 (subset A, B, C), UCC/EAN-128 K-Mart, UCC/EAN-128, UPC A/E (add on 2 & 5), I2 of 5, I2 of 5 with Shipping Bearer Bars, EAN 8/13 (add on 2 & 5), Codabar, Post NET, EAN 128, DUN 14, MaxiCode, HIBC, Plessey, Random Weight, Telepen, FIM, China Postal Code, RPS 128, GS1 Data Bar
	2D Barcode: PDF 417, Datamatrix code, matrix code, QR code, Micro QR code
Interfaces	Serial Port: RS-232 (DB-9)/USB Port: V2.0/ Parallel Port: Centronics 36-pin
Power	100-240 VAC, 50/60 Hz
Dimension (mm)	226 (W) x 285 (W) x 171 (H)
Weight (kg)	2.72

CAS

CAS BLDG., # 440-1, SUNGNAE-DONG,
GANGDONG-GU, SEOUL, KOREA

TEL_ 82 2 2225 3500

FAX_ 82 2 475 4668

<http://www.globalcas.com>

Specifications are subject to change for improvement without prior notice.

C-30902102