

POS SYSTEM

CAS POS Junior



FC CE KC

CAS POS JUNIOR

CAS POS JUNIOR is a good quality, high performance with reasonable price.

This model offers various type of CPU (J3455 / J6412 / i3 / i5 / i7) and good usage with related products specially CAS scale. This model has sturdy body and slim design. CAS POS Junior is perfect select to your restaurant, retail store and market!!

FEATURE

- 15" Ultra Wide LCD and Back light
- True-Flat PCAPTouCh
- High speed Intel Processor
- Fanless and Silent heat solution
- Easy Swap HDD Lack type
- Structure for easy maintenance
- MSR/iButton for Identification
- 2nd Display and Customer Display



CAS

CAS POS Junior

POS SYSTEM

Good Quality, Powerful Performer with Reasonable Price



Black



White



SPECIFICATION

Processors	Intel® Celeron® J3455/J6412 (Apollo Lake)	Intel® Core i3/i5/i7 (Kaby Lake 7th Generation)
Memory	DDR3L Standard 4GB (up to 8GB) Socket 1 x SODIMM	DDR4L Standard 4GB (up to 8GB) Socket 1 x SODIMM
HDD	2.5" SSD 128GB (up to 512GB)	
LCD	15.1" TFT LCD (Wide view) 1024x768 LED Backlight, 350cd/m2 (typ.)	
Touch	10 Point Capacitive Touch, USB interface Full-window type	
OS	Windows 10 IoT / Linux	
Rear IO	1x DC-12V 4-pin Power Input Connector 1x VGA Port with Power out (12V) 1x Ethernet Port (Gigabit RJ45) 2x USB (2.0) Serial port - COM1~2 (D-SUB 9Pin 5V/12V by BIOS) COM3~4 (RJ45 with flow control, 5V/12V by BIOS) COM5 (RJ11 only RX/TX with 5V, Reserved for MSR with USB) 1x Audio Jack (Line-out)	
Back IO	4x USB (2.0) RJ11 For CR Port (Virtual Com port)	
Sound	1 x 0.8W (Mono), *Option 2 x 0.8W (Stereo)	
Option	2nd Display : 9.7" TFT LCD (1024 x 768), RGB Interface, Optional Touchscreen, VFD, 20 Columns x 2 Lines Identification Reader (3 Track-HID & i-Button) by USB	
Dimension	364(W) mm x 340(H) mm x 210(D) mm	
Weight	Main Body - 8 kg / 9.7" Dual Monitor: 1.5 kg	
Certification	FCC, CE, KC	
Color	White, Black	
Power	60W Adaptor Input 100~240V/50~60Hz, Output DC 12V/SA	



ACCESSORY (OPTION)



Dual Monitor




VFD Display



Identification Reader (MSR)

PORT

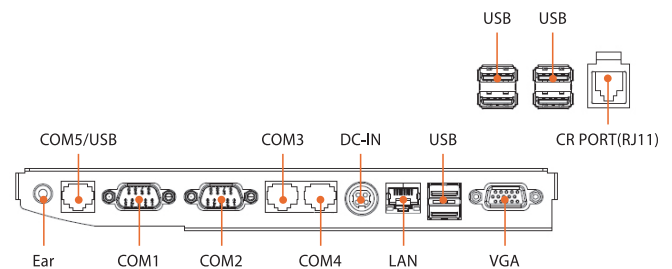

Ver 1.0_91012202



CAS Global Homepage

CAS CORPORATION

CAS BLDG., 1315, YANGJAE-DAERO
GANGDONG-GU, SEOUL, KOREA
TEL_82 2 2225 3500 / FAX_82 2 475 4668

www.globalcas.com



* Specifications are subject to change without notice improvement.

