

CFF series

CAS RF Fork Scale

- Wireless data communication
- Easy to put up, or put out the fork scale because there isn't interference through the wire cable
- Vestibule and heavy duty



ISO 9001 certified

CAS
S • C • A • L • E

CFF series CAS RF Fork Scale

FEATURES

- Wireless data communication
- Easy to install because of radio frequency method
- Easy to put up, or put out the fork scale because there isn't interference through the wire cable
- Vestibule and heavy duty
- Possible to recharge in forklift without outside power source


SPECIFICATIONS

MODEL	CFF-2	CFF-3	CFF-5
Maximum Capacity	4000lb/2000kg	6000lb/3000kg	10000lb/5000kg
Minimum Division	2lb/1kg	5lb/2kg	5lb/2kg
Accuracy	0.1%		
Power Source	Scale: 1.2V 2200mAh 6EA, Indicator: DC 12V (Car Battery)		
Indicator(TW-200)	5 digit LCD(IP65)		
Operating Time	10 hour		
Option	Printer		
Function	Back Light, Zero, Tare, Count, kg/lb		
RF Band	KOREA: 424MHZ, EC: 433MHZ, USA: 915MHZ, JAPAN: 426MHZ		

INDICATOR(TW-200)



DIMENSIONS

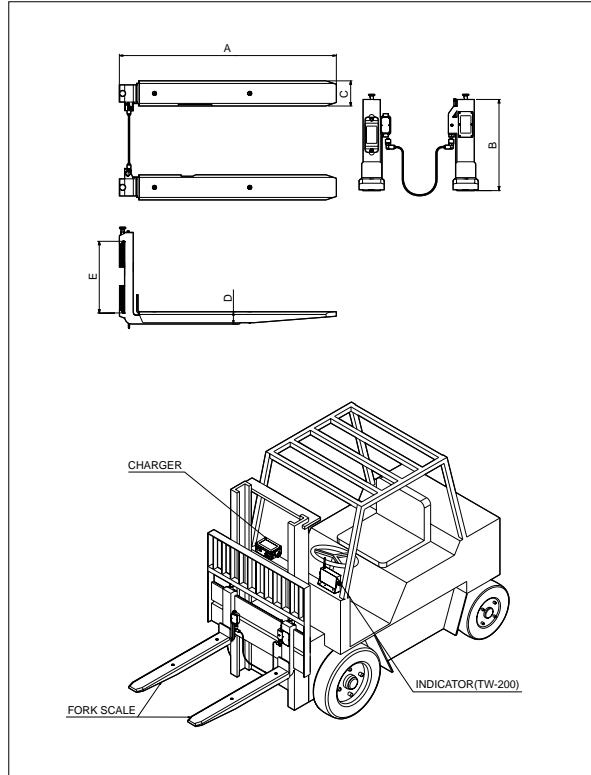

Unit: inch (mm)

Model	CFF-2	CFF-3	CFF-5
A	47.2(1200)	47.2(1200)	50.4(1280)
B	20.9(530)	25.7(652)	33.1(840)
C	5.7(146)	7.7(196)	7.7(196)
D	2.8(70)	2.8(70)	3.6(92)
E	16(407)	20(508)	25(635)



CAS USA Corporation

NJ OFFICE
99 Murray Hill Parkway
East Rutherford, NJ 07073
Tel: (201) 933-9002
Fax: (201) 933-9025

<http://www.cas-usa.com>

CA OFFICE
733 S. State College Blvd #98
Fullerton, CA 92831
Tel: (714) 870-1286
Fax: (714) 870-1167

Specifications are subject to change for improvement without prior notice.

2002. 5