

Basic Scale

PR2N-D/DU series



Simple Weighing Scale




With its low-profile structure, PR2N-D/DU Simple Weighing Scale is perfectly suited for various environment, including market & shop, ensuring both convenience and efficiency. Also, It features a bright and clear LCD/LED display, along with versatile communication interfaces and power options.



Low-profile structure



Bright & Clear Display



Simple & Easy Operation



Fast & Accurate Weighing

FEATURES

Feature 1 Bright & Clear Display

- Easy to Check display information via Bright & Clean LCD/LED display
 - 6 digits LCD/LED display
 - Character Height : PR2N-CD (LCD) 16mm (with White backlight)
 - PR2N-ED/EDU(LED) Front : 17.3mm / DU Rear : 15mm



LCD Display with white backlight



LED Display

Feature 2 Low-profile Design

- Low-profile design enables easy weighing and optimal use of space.




Feature 3 Fast & Accurate Weighing

- PR2N-D/DU series is equipped with CAS One-Chip, ensuring fast and accurate weighing performance.



Feature 4 Simple & Easy Operation

- Key: 4ea
- Various Weighing Mode: General Weighing, Weight Comparison Mode, Counting Mode



Feature 5 Easy to Install


- 9-pin RS-232C and USB Type B communication (Optional, Available simultaneously)
- Powered by various sources
 - Rechargeable battery or AC adapter
 - Optional : 1.5V D size Dry battery x 3ea, USB Type B(5V) (not for charging)



SPECIFICATIONS

| MODEL | PR2N-D/DU | | |
|------------------------------------|---|---------|----------|
| Capacity | 3/6 kg | 6/15 kg | 15/30 kg |
| Readability | e=1/2 g | e=2/5 g | e=5/10 g |
| Resolution | Dual 1/3000 | | |
| Display | D type(LCD) : 6 digit LCD with backlight (Character Height : 29mm) D type(LED) : 7 Segment 6 digit LED (Character Height : 17.3mm) DU type(LED) : 7 Segment 6 digit LED x 2ea (Character Height Front : 17.3mm / Rear : 15mm) | | |
| Symbols | STABLE, ZERO, TARE, g, kg, Low Battery, HI / OK / LO & PCS (STABLE, ZERO, TARE, g, kg, lb, oz, Low Battery, HI / OK / LO & PCS, LK, Power) | | |
| Keys | ZERO/ TARE/ MODE / FUNCTION | | |
| Functions | General Weighing, Counting Function : Counting Sample Range 10, 20, 50, 100, 200, 500 Weight Comparison Function : hi, ok, low, Backlight ON/OFF Control Function, Hold, Unit Conversion | | |
| Power | 4V / 4Ah Rechargeable(Pb) battery, 6 VDC Adapter, 1.5 V D size dry battery x 3ea(Optional), USB 5V(Optional) | | |
| Battery Operation Time | LCD (BL off) : Approx. 360 hours (Pb Battery) / 540 hours (Alkaline) / 270 hours (Mn) LED : Approx. 240 hours (Pb Battery) / 360 hours (Alkaline) / 180 hours (Mn) | | |
| Communication Interface (Optional) | RS-232C / USB type B (Power supply and communication support) - Available simultaneously | | |
| Operation Temperature | -10 °C ~ +40 °C | | |
| Platter size(mm) | 330 (W) x 235 (D) | | |
| Product size | D TYPE : 341 (W) x 383 (D) x 102 (H) DU TYPE : 341 (W) x 435 (D) x 474 (H) | | |
| Weight(kg) | D type : 3.3 kg / DU type : 3.6kg | | |
| Option | 1.5V D size dry battery x 3ea, RS-232C, USB type B | | |

DIMENSIONS

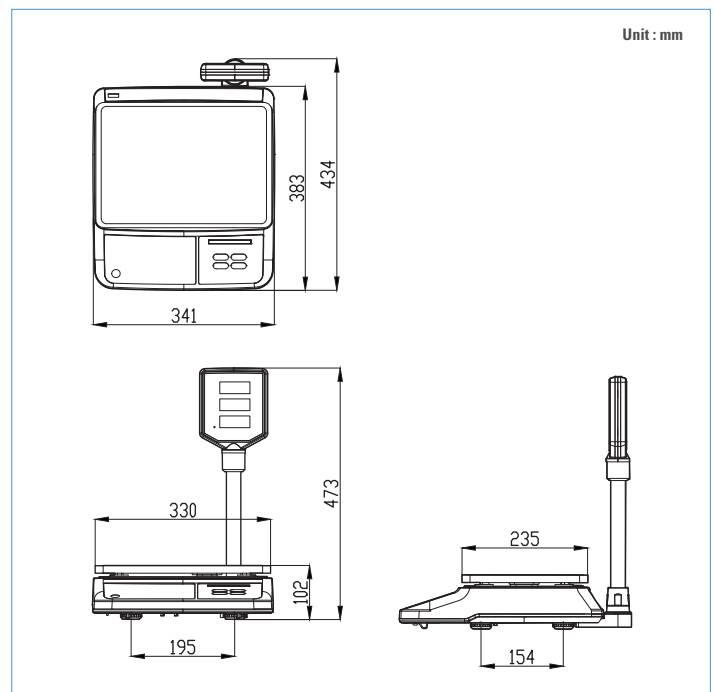

OPTIONS

- Dry battery
- RS-232C
- USB type B (for communication and Power, not for battery charging)



Ver. 1.0.410152



CAS Global Homepage

CAS Co., Ltd

Headquarters : 262, Geurugogae-ro, Gwangjeok-myeon, Yangju-si, Gyeonggi-do, Korea

Seoul Office : CAS Building, 1315, Yangjae-daero, Gangdong-gu, Seoul, Korea

TEL : 82 2 2225 3500 FAX : 82 2 475 4668

www.globalcas.com



* Specifications are subject to change without notice improvement.