

4" Direct Thermal Label Printer

BLP-400




4" 다이렉트 열전사 라벨프린터

BLP-400는 Direct Thermal 방식의 라벨을 인쇄하는 물류, 유통, 제품 생산라벨 및 영수증 인쇄에 적합한 프린터입니다. 좁은 공간에서의 설치가 가능하며, 라벨 디자인 프로그램 지원으로 사용자가 손쉽게 사용 할 수 있습니다.

또한 다양한 통신사양(USB, RS-232, Ethernet)과 액세서리(라벨롤 홀더, 커터모듈, 필러 모듈)로 제품의 호환성을 높였습니다.



안정적인 프린thead 디자인

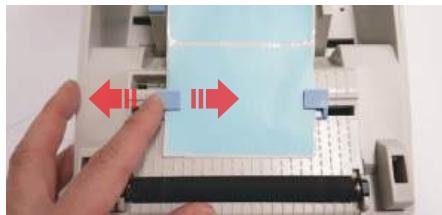

라벨 폭/길이 조절 기능



원버튼으로 간편사용

■ 제품특징


1. 안정적인 TPH(열전사 프린터 헤드) 디자인

대형 인쇄 볼륨에도 안정적인 TPH 설계
열전사 인쇄를 위한 긴 TPH 수명



2. 라벨 폭/길이 조절 사용 가능

모든 타입의 라벨, Continuous/Gap/Black market 라벨 지원
최대 108 mm, 라벨 폭/길이 조절 사용 가능

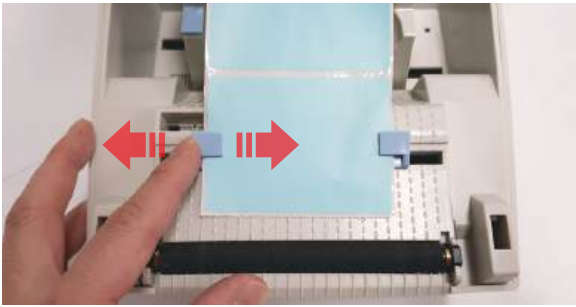

3. 원버튼으로 간편 사용

하나의 버튼으로 다양한 기능 수행



4. 더블 타입 센서 적용

5. 127 mm 대형 페이퍼 를 적용가능

6. 빠른 인쇄 속도

■ 제품사양

| ITEM | | BLP-400 |
|--------------------------|-----------------------------------|--|
| Printer | Print method | Direct Thermal Printing |
| | Resolution | 203 dpi (8 dots/mm) |
| | Print Speed | 2 ips ~ 5 ips |
| | Printing Width | 25.4 mm ~ 108 mm |
| | Printing Length | 15 mm ~ 1,200 mm |
| Programming Language | | TSPL, ZPL |
| Barcode | Linear Barcodes | Code 39, Code 93, Code 128UCC, Code 128, Codabar, Interleave 2 of 5, EAN8, EAN13, UCC/EAN128, UPC-A, UPC-E, MSI, PLESSEY, POSTNET, RSS-Stacked, GS1 DataBar, Code 11 |
| | 2D Barcodes | QR Code, PDF417, DataMatrix, Aztec |
| Media | Type | Roll-fed or Fan-fed, Die cut or Continuous direct thermal labels with or without black mark, Tag stock |
| | Diameter (Media Roll) | 127 mm |
| | Thickness | 76.2 μm ~ 177.8 μm |
| | Diameter (Core) | 0.5" (12.7 mm), 1" (25.4 mm), 1.5" (38.1 mm) |
| Sensors | Gap Sensor | Transmissive (Fixed) |
| | Black Mark Sensor | Reflective (Adjustable, Half-Range) |
| | Other | Head-Up Sensor, Ribbon, End Sensor, Paper Out Sensor |
| Interface | Standard | USB Type-B, Serial Port, Ethernet |
| | Option | Bluetooth, Wi-Fi |
| HIC | Button | Feed |
| | Indicator Light | LED (Three colours) |
| Power Adapter | Input | AC 100 ~ 240 V, 50/60 Hz |
| | Output | DC 24 V, 2.5 A |
| Reliability | TPH | 50 km |
| Memory | RAM | 32 MB |
| | ROM | 16 MB |
| Softwares | Driver | Windows Vista/7/8/10 |
| | | Windows Server 2008/Server 2012/Server 2016 |
| Options and Accessories | External 8-inch Label Roll Holder | |
| | Cutter Module (G4GC, White) | |
| | Peeler Module (G4P, White) | |
| Physical Characteristics | 240(L) × 225(W) × 171(H) mm | |
| Empty Weight | 2.26 kg | |
| Agency Approvals | CCC, FCC, CE | |



고객지원센터 : 1577-5578

본사 : 경기도 양주시 광적면 그루고개로 262 T. 031 820 1100
 서울사무소 : 서울 강동구 양재대로 1315(성내동) 카스빌딩 T. 02 2225 3500 F. 02 475 4688/9
 인천 | 032 434 0281 광주 | 062 363 0262 대전 | 042 672 1016 대구 | 053 356 7111
 부산 | 051 313 3626 전주 | 063 211 4661 창원 | 055 255 4371 울산 | 052 267 3626
 여수 | 061 691 0262 천안 | 041 621 1015 구미 | 054 476 6353 수원 | 031 8015 4295

